


Mini CleanFoam® Swab

CleanFoam® Series

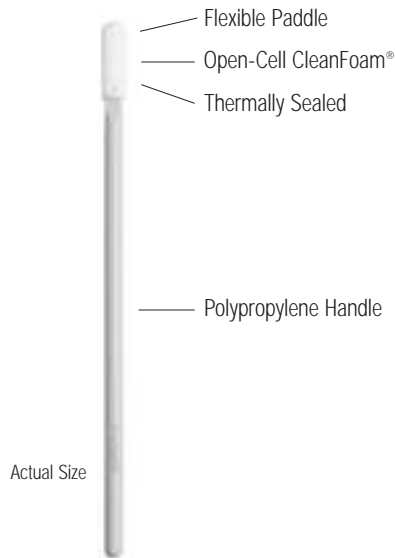

Description

The Mini CleanFoam® Swab is an excellent swab for cleaning very small areas. Its laundered CleanFoam® head possesses good capacity and cushioning. A compact, round handle and flexible head paddle provide support without added thickness. This swab is well suited for cleaning thin, grooved areas of parts and assemblies.

Features

- Laundered polyurethane CleanFoam® head over thin, flexible paddle
- 100 ppi open-cell structure
- Compact, light green polypropylene handle
- Thermally bonded head
- Soft and nonabrasive

Benefits

- Low nonvolatile residue
- Low particle generation
- Excellent sorbency
- No contaminating adhesives
- Good chemical resistance

Applications

- Cleaning with solvents such as IPA
- Applying lubricants and other liquids
- Removing excess materials

Products

| TX Number | Description | Packaging |
|---------------|----------------------|--|
| TX747H | Mini CleanFoam® Swab | Bag-Within-A-Bag®; 500 swabs/bag; 5 inner bags of 100 swabs; 5 bags/case |

ITW Texwipe®

North America
1210 South Park Drive
Kernersville, NC 27284
Tel (800) TEXWIPE
(336) 996-7046
Fax (336) 996-2297
www.texwipe.com
info@texwipe.com

Europe/Middle East
Saffierlaan 5
2132 VZ Hoofddorp
The Netherlands
Tel +31 88 1307 400
Fax +31 88 1307 499

Asia/Pacific
50 Tagore Lane
#02-01 Entrepreneur Centre
Singapore 787494
Tel +65 6468 9433
Fax +65 6468 6772

Mini CleanFoam® Swab

TX747H

Physical Characteristics

| | |
|-------------------|--------------------------------------|
| Head material | 100 ppi open-cell CleanFoam® |
| Head width | 3.3 mm (0.126") |
| Head thickness | 3.3 mm (0.102") |
| Head length | 10.3 mm (0.394") |
| Handle material | Polypropylene |
| Handle width | 2.5 mm (0.087") |
| Handle thickness | 2.5 mm (0.087") |
| Handle length | 57.7 mm (2.350") |
| Total swab length | 69 mm (2.744") |
| Head bond | Thermal |
| Handle color | Light green |
| Design notes | Flexible head paddle; compact handle |

Contamination Characteristics

| Property | Measurement | Test Method* |
|---------------------|----------------|---|
| Nonvolatile residue | | |
| IPA extractant | 0.01 mg/swab | TM10: Procedure for Determining the Nonvolatile Residue (NVR) Extractable from Swabs in a Given Solvent |
| Ions | | TM12: The Determination of Ions in Wipers and Other Materials by Capillary Ion Analysis (CIA) |
| Chloride | 0.05 µg/swab | |
| Sulfate | 0.01 µg/swab | |
| Nitrate | < 0.01 µg/swab | |
| Phosphate | < 0.01 µg/swab | |
| Fluoride | < 0.01 µg/swab | |
| Potassium | < 0.01 µg/swab | |
| Calcium | < 0.01 µg/swab | |
| Sodium | 0.12 µg/swab | |
| Magnesium | < 0.01 µg/swab | |

*Test procedures available upon request.