




Superior Quality -Purus mats are produced in an ISO 9000 factory. The completely integrated manufacturing process with film extrusion, coating, laminating and converting ensures consistent quality. A constant coat weight of adhesive yields a higher performing mat without excessive tack issues. The correct softness enables dirt to embed into the adhesive with just enough thickness to accept and contain the particles. QC test data and reports are available for each shipment or case of product.

Multi-Layered Construction -Purus mats are available in 30 or 60 layer versions. Each layer of the mat is fully coated with a particle grabbing adhesive and constructed of low density polyethylene film. A low profile numbered tab indicates the number of remaining layers and ensures one-layer-at-a-time removal.

Product Availability -Standard sizes and colors are on-hand and can be shipped within time frames that meet most customer expectations. Custom sizes and configurations are available with extended lead times.

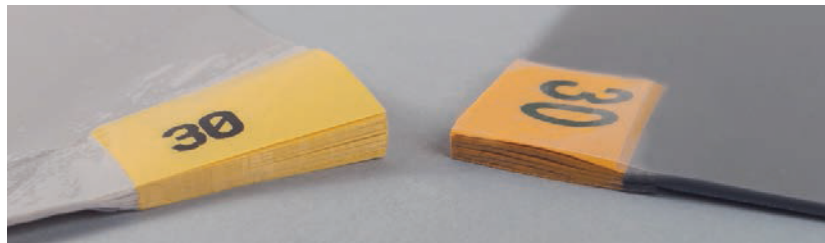

Purestep

Multi-layered, adhesive-coated mat that removes dirt and dust from foot traffic and wheels prior to their entry into a critical manufacturing environment.

Characteristics:

- QC test data and reports available for each shipment or case.
- Low profile, numbered tabs.
- Available in 30 or 60 layers with four or eight mats/case.
- Consistent adhesive coverage ensures maximum performance of each layer.

| Specifications: | Regular Tack | High Tack |
|---------------------|--------------------------|---------------------------|
| Film | Low density polyethylene | Low density polyethylene |
| Adhesive | Acrylic | Acrylic |
| Adhesive Thickness | 0.3 mil. / 8 µm | 0.3 mil. / 8 µm |
| Peel Adhesion "top" | 6.5 oz. / 190g/25mm ± 40 | 9.25 oz. / 250g/25mm ± 40 |
| Heat Resistance | 158°F / 70° C – 48 Hours | 158°F / 70° C – 48 Hours |


| Size (*) | Color (**) | Purus Catalog Number | | |
|----------|------------|----------------------|---------------|---------------|
| | | 30 Layer-4/cs | 30 Layer-8/cs | 60 Layer-4/cs |
| 457x914 | White | PM 1836 34 W | PM 1836 38 W | PM 1836 64 W |
| 457x1143 | White | PM 1845 34 W | PM 1845 38 W | PM 1845 64 W |
| 610x914 | White | PM 2436 34 W | PM 2436 38 W | PM 2436 64 W |
| 660x1143 | White | PM 2645 34 W | PM 2645 38 W | PM 2645 64 W |
| 914x1143 | White | PM 3645 34 W | PM 3645 38 W | PM 3645 64 W |

| Size (*) | Color (**) | Purus Catalog Number | | |
|----------|------------|----------------------|---------------|---------------|
| | | 30 Layer-4/cs | 30 Layer-8/cs | 60 Layer-4/cs |
| 457x914 | Blue | PM 1836 34 B | PM 1836 38 B | PM 1836 64 B |
| 457x1143 | Blue | PM 1845 34 B | PM 1845 38 B | PM 1845 64 B |
| 610x914 | Blue | PM 1845 34 B | PM 2436 38 B | PM 2436 64 B |
| 660x1143 | Blue | PM 2645 34 B | PM 2645 38 B | PM 2645 64 B |
| 914x1143 | Blue | PM 3645 34 B | PM 3645 38 B | PM 3645 64 B |

(*) Contact your Sales Representative for complete list of sizes available

(**) Grey and clear are also available in select sizes and configurations

(***) The specifications listed above relate to all sizes of mats produced even though the size may not be listed on this sheet

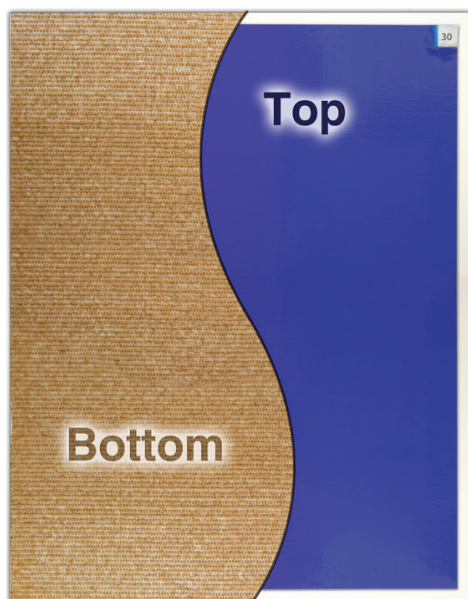

PurestepFrames

Designed to be used with the Purus Mat to create a system that is easy to use in any critical area.

Characteristics:

- Naturally antimicrobial, mold and mildew resistant
- Non-Slip made from Polymer Coated polyester textile
- Non-skid backing Reduces the risk of slips and falls
- Protect floors from adhesive residue from the Purus Mats

| Frame Size (mm) | For Mats (mm) | Catalog No. (white) |
|-----------------|---------------|---------------------|
| 508x965 | 457x914 | PF 2038 01 W 00 |
| 508x1194 | 457x1143 | PF 2047 01 W 00 |
| 660x965 | 610x914 | PF 2638 01 W 00 |
| 965x965 | 914x914 | PF 3838 01 W 00 |
| 965x1194 | 914x1143 | PF 3847 01 W 00 |
| 965x1575 | 914x1524 | PF 3862 01 W 00 |

Specifications

- Material : Polystyrene
- Thickness : 3.2mm
- Packaging : Each

** Mats are not included.