


7DKM Anti-Static Bulk Pack Latex Fingercots

Data Sheet

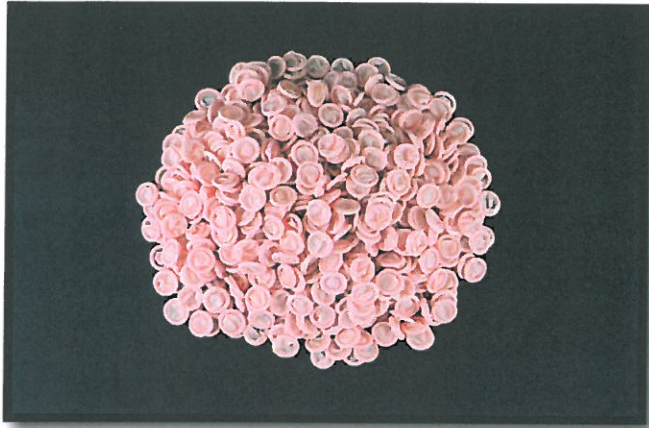

Key Features

- Compliant with ASTM and IEST-RP-CC 005.3 standards
- Average surface resistance 10^{10} Ohms per square unit
- For use with Class II static sensitive devices (thresholds above 1000V)
- RoHS compliant
- P3 Polar Process
- 100% natural latex - Pink for easy identification
- Not packaged for individual sale
- For industrial use only
- Sizes: S - XXL
- Pack: 10 gross (1400 ea)/polybag

Industrial Applications

- ESD-sensitive areas
- Defence, avionics
- Marine electronics, consumer electronics
- IC industries, wire bonding
- Repair stations, assembly area

Quality Assurance Conformity

D 3772-92 ASTM Standard Specification for Rubber Finger Cots

IES-RP-CC005.2 Gloves and Finger Cots Used in Cleanrooms and Other Controlled Environments

D 573-88 (1984)e1 ASTM Standard Test Method for Rubber Deterioration in an Air Oven

21 CFR 170

MIL-STD-1686C

7DKM Anti-Static Bulk Pack Latex Fingercots

FINGERCOT COMPOSITION

Material:	Natural Rubber Latex (Bio-degradable)	Material Color:	Pink
Mil Thickness:	3.5	Length:	2.75 inches
Country of Origin:	Vietnam	Product ID:	7DKM

Physical Data Dimensions:	Length		Width	Thickness
	Inches	mm	mm	mm
Small	2,75	70 ± 5	24 ± 2	0.09 ± 0.03
Medium	2,75	70 ± 5	28 ± 2	0.09 ± 0.03
Large	2,75	70 ± 5	30 ± 2	0.09 ± 0.03
X-Large	2,75	70 ± 5	34.5 ± 2.5	0.09 ± 0.03
XX-Large	2,75	70 ± 5	37 ± 2.6	0.09 ± 0.03
Tensile Properties:	(Tensile Strength (MPa))		Mean	Sample Size
			24	18
			20	18
			20	18
Physical Appearance:	Rolled fingercots, pink color, textured tip			
Powder Coating:	None			
Case Pack	10 gross (1400 per pack-packed by weight) per pack 20 packs/case			

Storage: Store in a cool, dry location, away from sources of light. Avoid extremes of heat or cold. Recommended storage temperature range: 50°F – 86°F (10°C – 30°C)